

PERFORMANCE BULLETIN



YPB#: PB_PAT_2600HPS_F300XCA_2012-12-12_BAY

Test Date 12/12/12



PATHFINDER


Boat Manufactured By:

Pathfinder Boats • 3207 Industrial 29th Street • Ft. Pierce, FL 34946
772-465-0631 • www.pathfinderboats.com

PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	5.1	1.2	4.25
1500	7.3	2.2	3.32
2000	8.3	3.6	2.31
2500	14.0	5.4	2.59
3000	20.4	6.3	3.24
3500	29.3	8.0	3.66
4000	36.6	10.6	3.45
4500	42.5	14.1	3.01
5000	48.4	16.7	2.90
5500	54.8	21.7	2.53
6000	59.4	25.9	2.29

Time to Plane 3.21
0~30 MPH 6.12

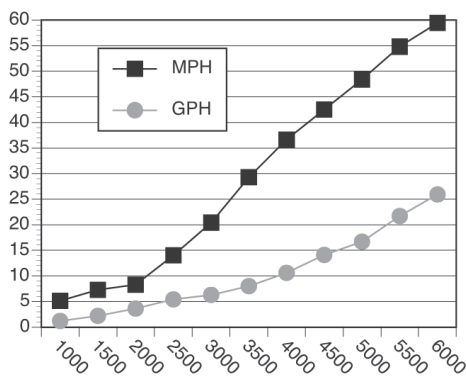

Test performed and verified by Yamaha Applications Engineers.

Pathfinder® 2600 HPS

Length	26' 2"
Beam	8' 10"
Dry Weight (Boat Mfr. Pub)	2,800 lbs
Maximum HP	350
Fuel Capacity	80 gal
Weight as Tested	3,772 lbs

F300XCA

Horsepower	300 HP
Induction	EFI
Displacement	4.2 L
Weight	562 lbs
Gear Ratio	1.75

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#1 on 10" Hydraulic Jack Plate
------------------------	--------------------------------

PROPELLERS

Series	Reliance Series-SDS
Diameter/Pitch	13-3/4 x 21
Yamaha Part #	68F-45976-10-00
Propeller Material	Polished Stainless Steel

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	84 / 74° F
Elevation (in feet above sea level)	Sea Level
Wind Velocity	15-20 mph

Comments: Test weight includes full tank of fuel, 1 battery, Power-Pole, 10" Atlas jack plate, safety and test gear.

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

For more information

Yamaha Motor Corporation, U.S.A.
OEM Division, Marine Group
1270 Chastain Road NW

Kennesaw, GA 30144 • (800) 88-YAMAHA

For other Performance Bulletins, visit www.yamaha-motor.com.